

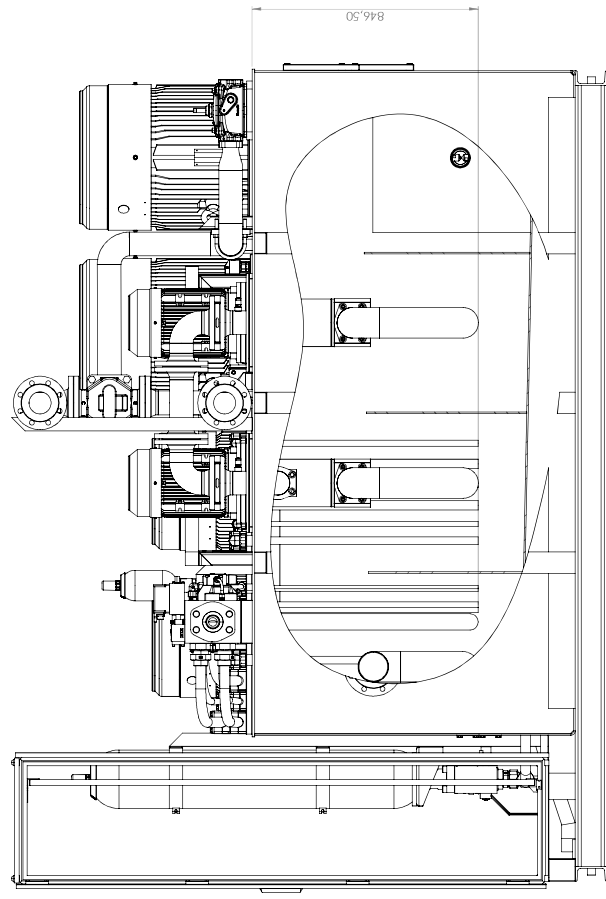
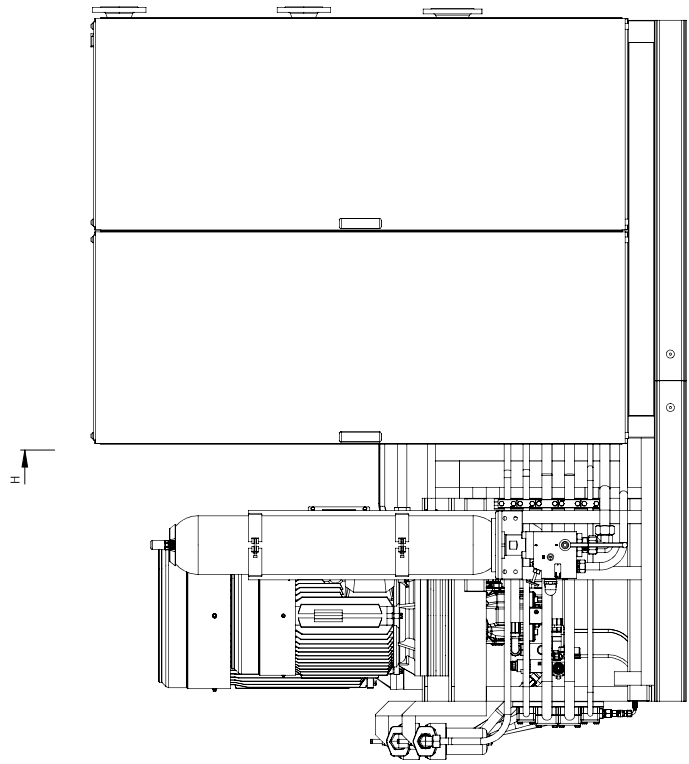
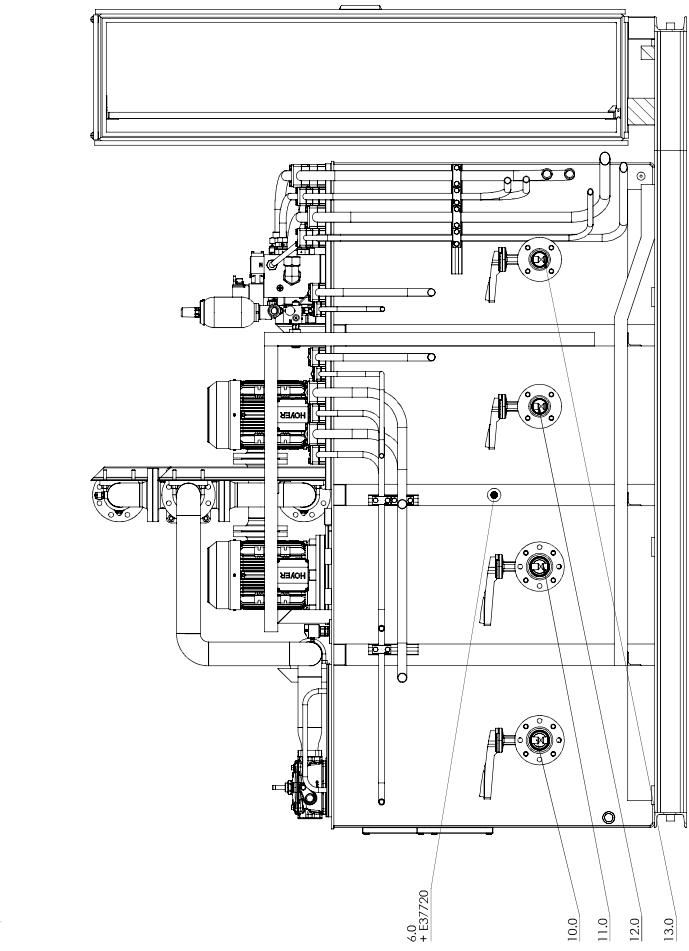
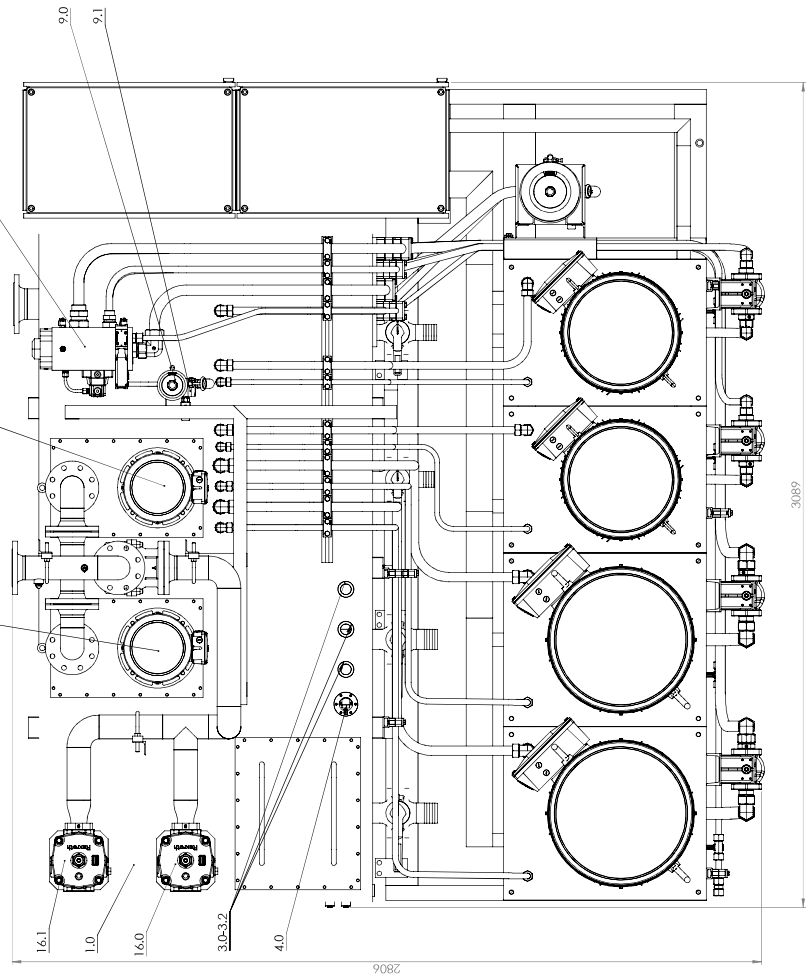
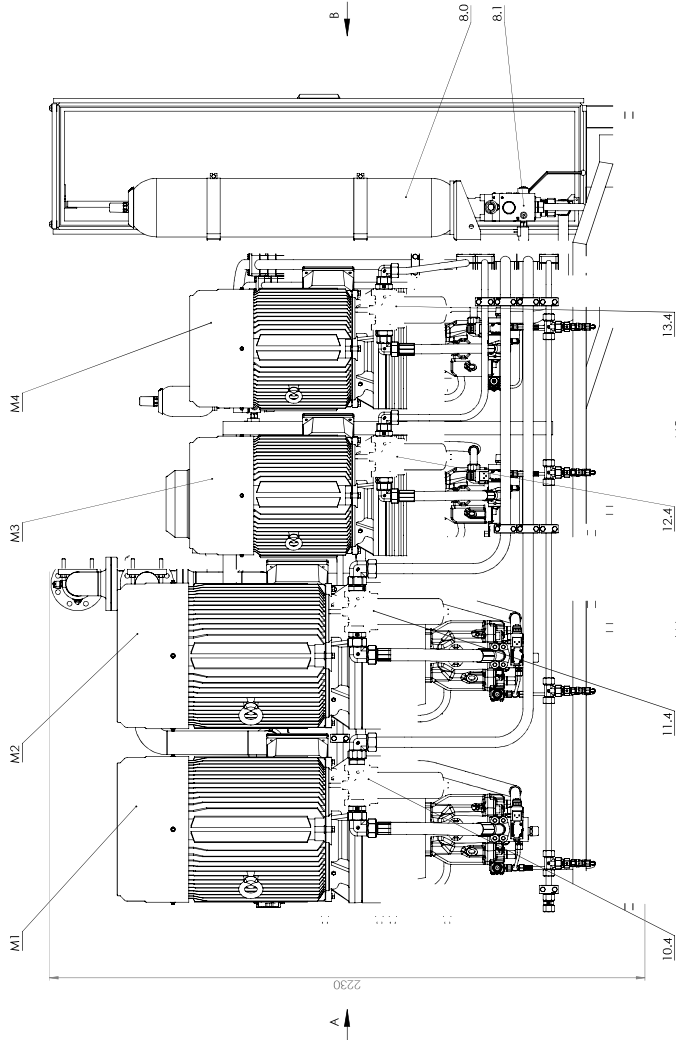


WIDOK C


[illegible]

CIĄGI TECHNICZNE

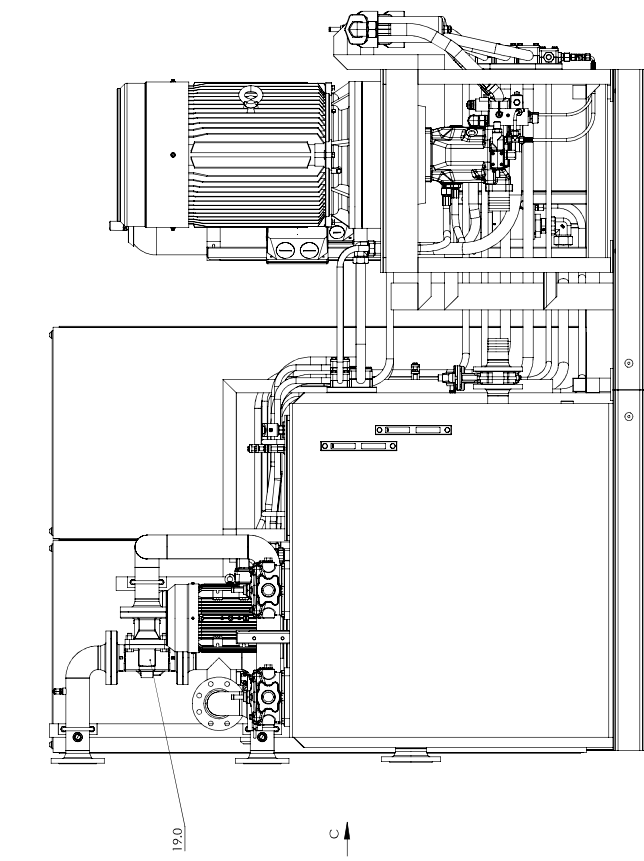

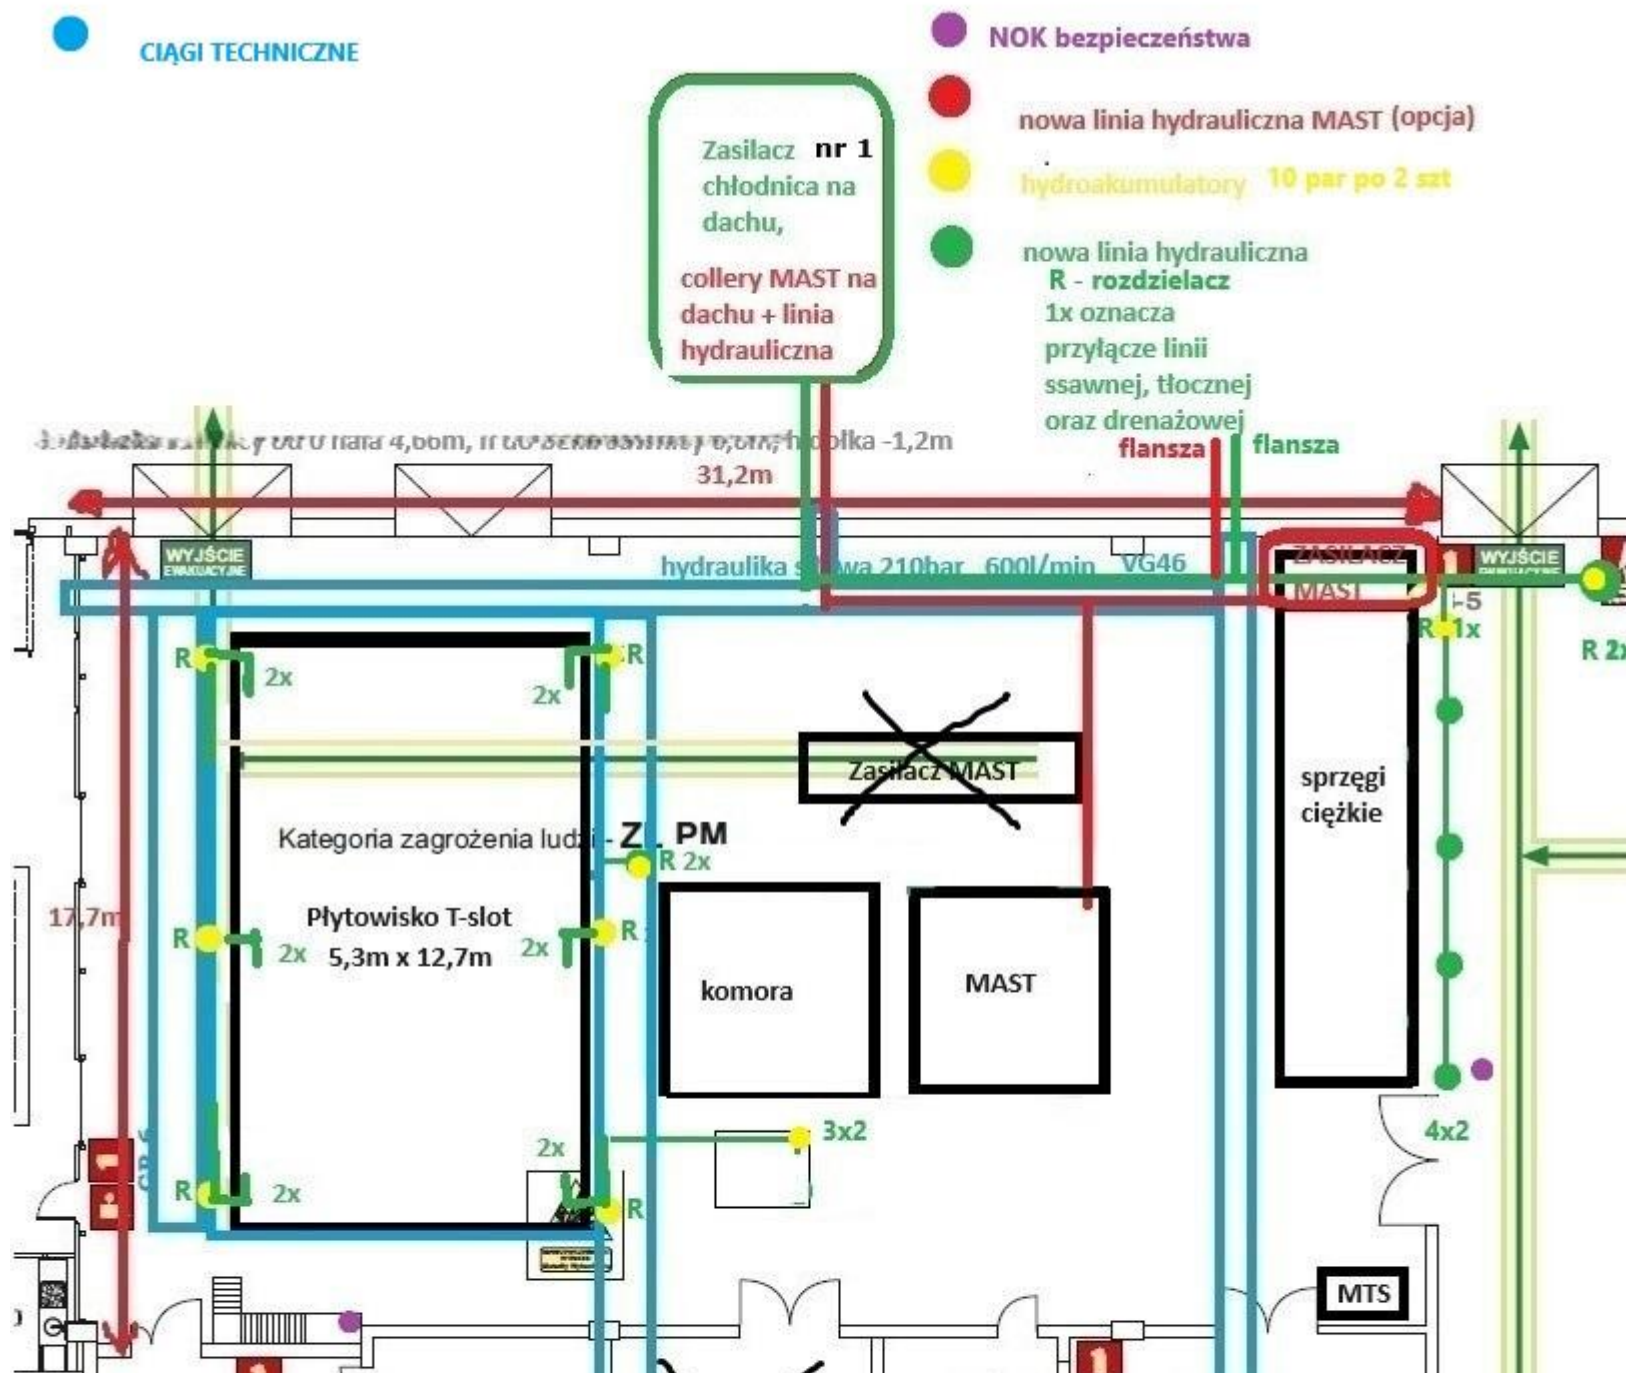




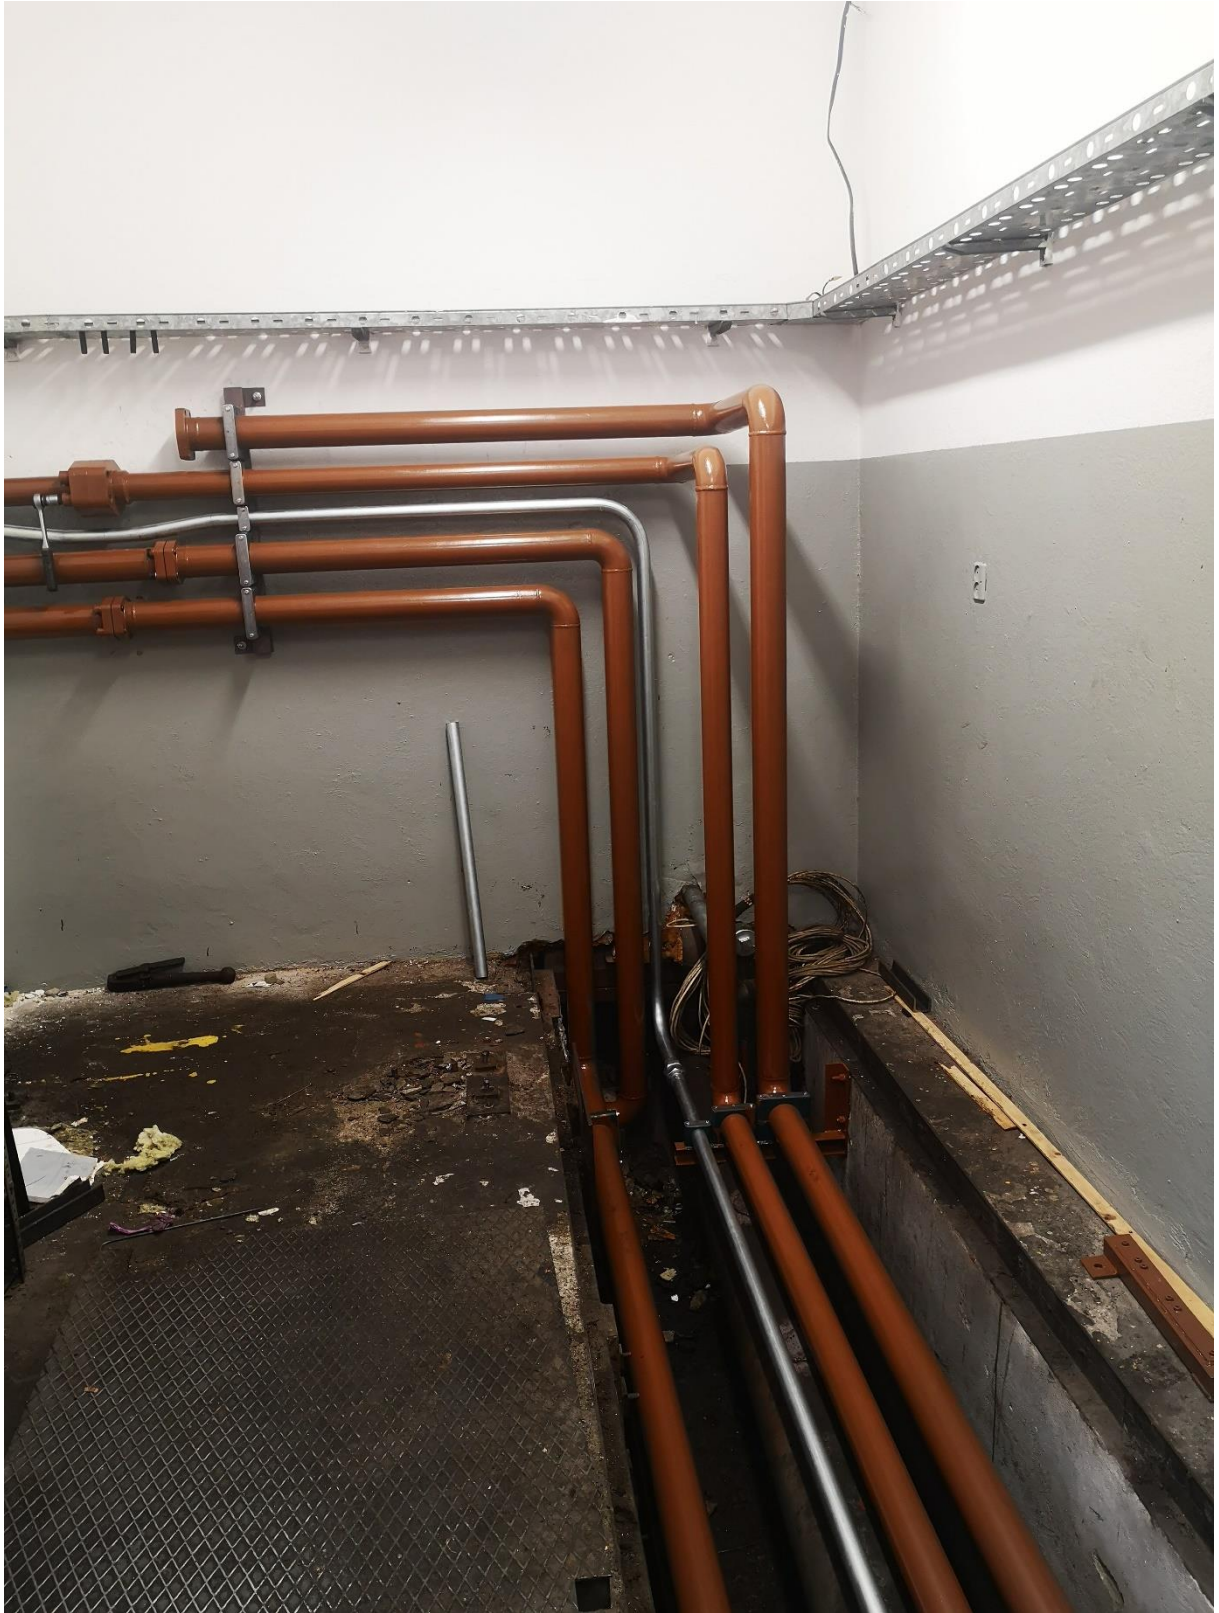







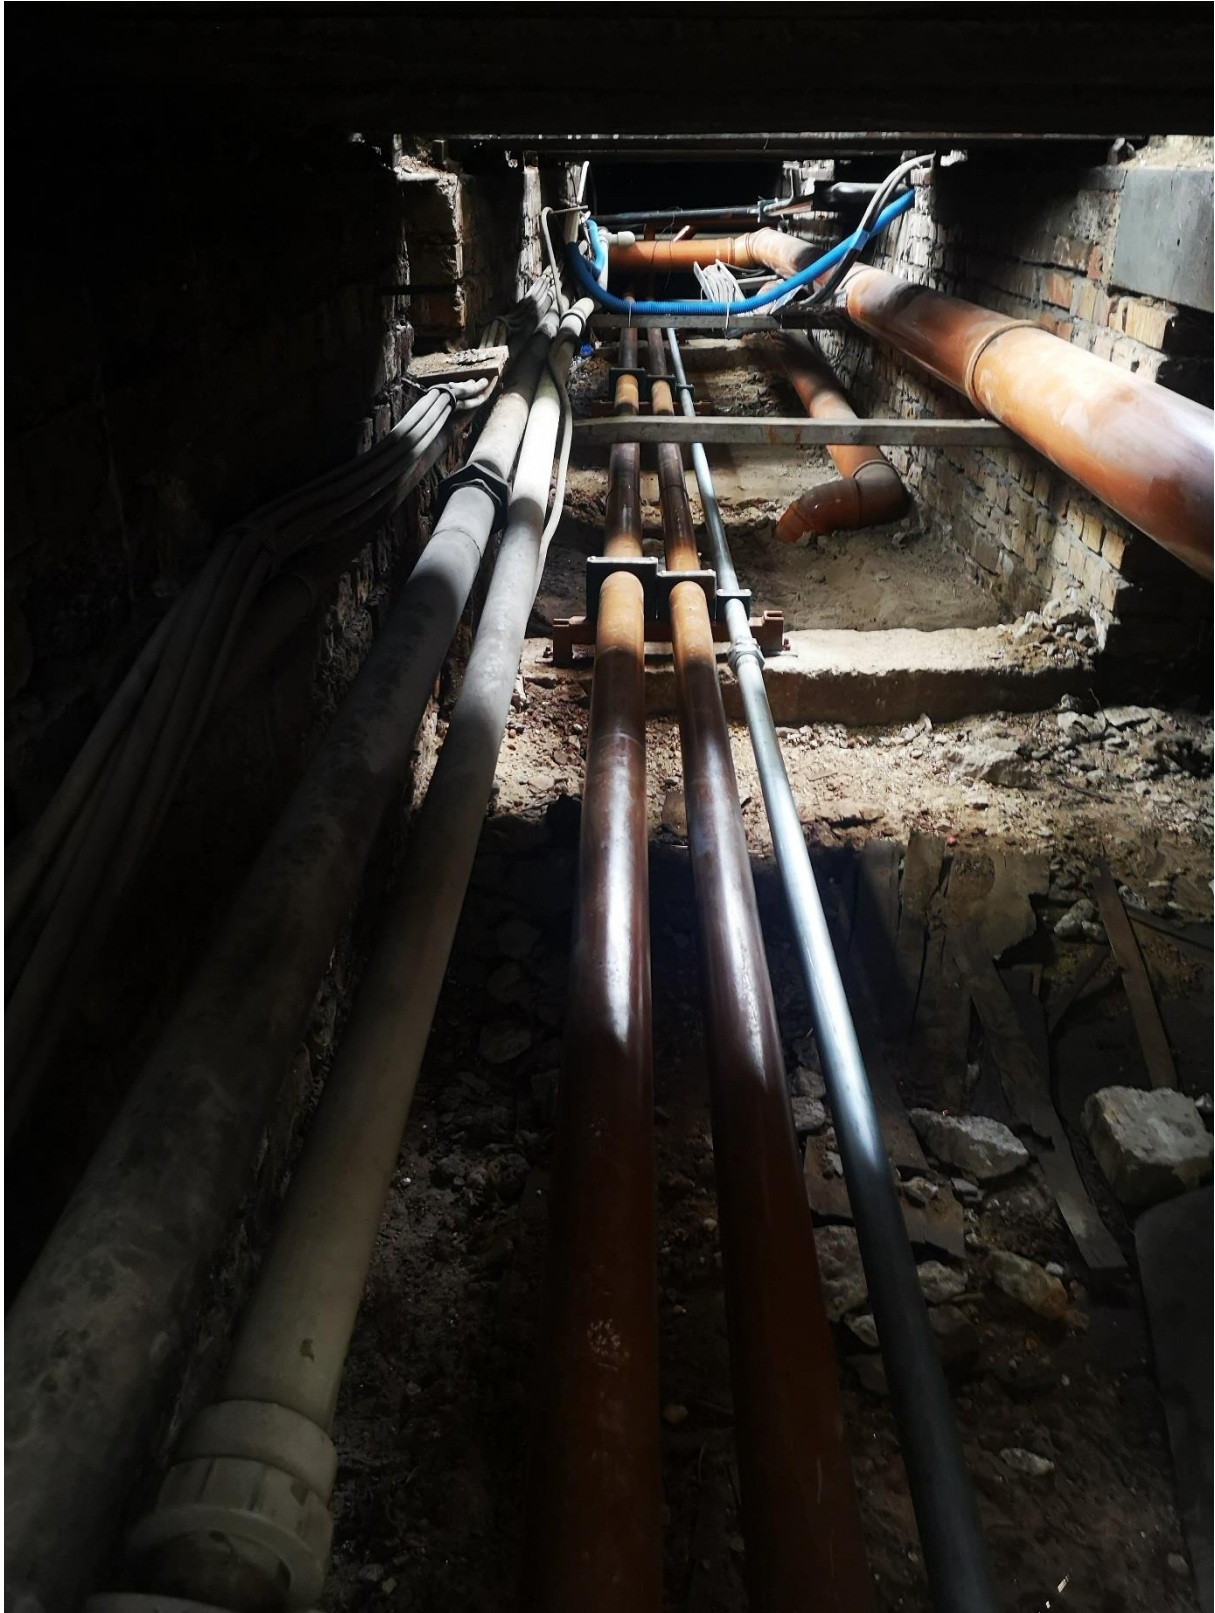











parker Hannifin
HYDRAULIC ACCUMULATOR
CYLINDER DIVISION

MODEL NO. **A4A0116BJK**

SERIAL NO. **K-731504**

OPERATING PRESSURE **3000** CAPACITY (CUBIC IN.) **1.16**

CAUTION PRECHARGED TO **5000** PSI

MIN. BURST PRESSURE **6000** PSI

DO NOT EXCEED FLUID PRESSURE BEFORE DISCHARGE
DO NOT EXCEED LINE RELEASE GAS AND FLUID PRESSURE
DO NOT EXCEED ASSEMBLY

INSTALLATION
MAY BE MOUNTED IN ANY POSITION
SUPPORT AT END CLOSURE
DO NOT CLAMP TIGHTLY OR

SEE PAGES 14
SEE PAGES 14

parker **Hannifin**
HYDRAULIC ACCUMULATOR
CYLINDER DIVISION

MODEL NO. **A4A0116B1K**

SERIAL NO. **K-73 504**

OPERATING PRESSURE (MAX) PSI **3000** CAPACITY (CUBIC IN.) **116**

CAUTION PRECHARGED TO **6000** PSI
DESIGNED FOR:

6000 MIN. BURST PRESSURE **6000** PSI PROOF TEST

RELEASE FLUID PRESSURE BEFORE DISCONNECTING PRESSURE LINE. RELEASE GAS AND FLUID PRESSURE BEFORE DISASSEMBLY.

RECHARGE ONLY
WITH DRY INERT
GAS SUCH AS HIGH
PURITY NITROGEN

- INSTALLATION:
- MAY BE MOUNTED IN ANY POSITION.
 - SUPPORT AT END CLOSURES.
 - DO NOT CLAMP TIGHTLY ON SHELL.

SALES: DES PLAINES, ILL. SERVICE: SEBRING, CALIF.